

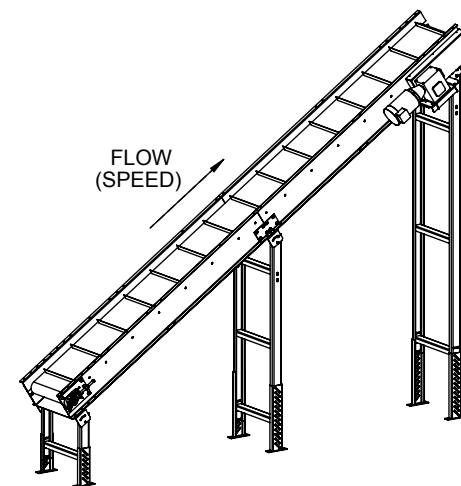
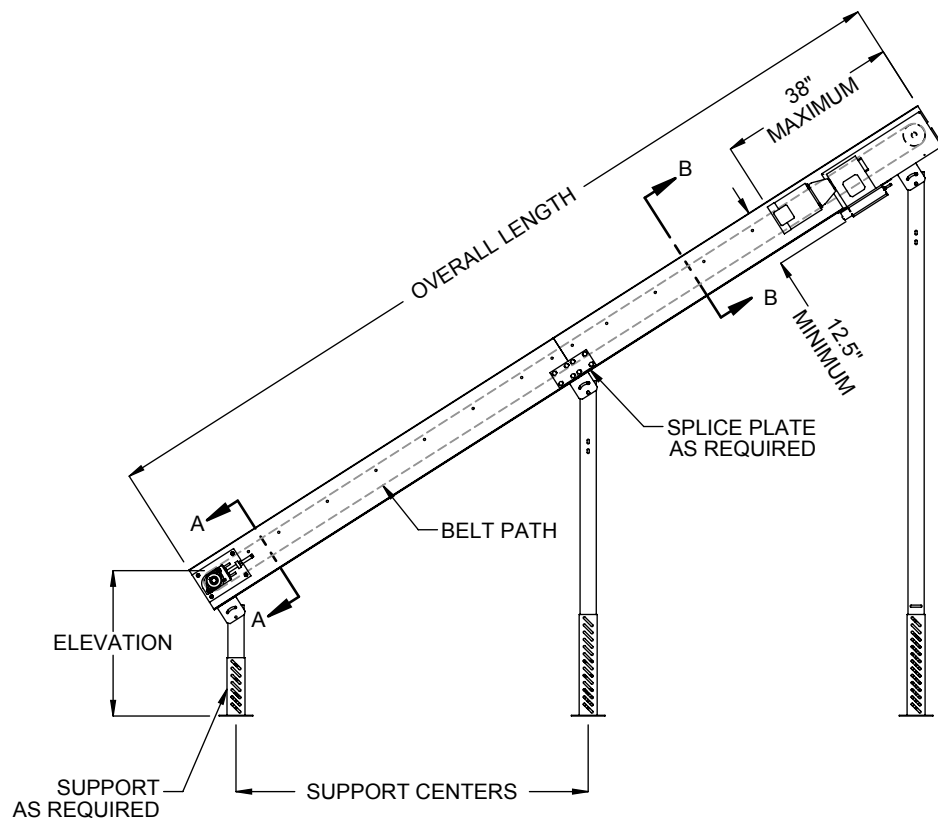


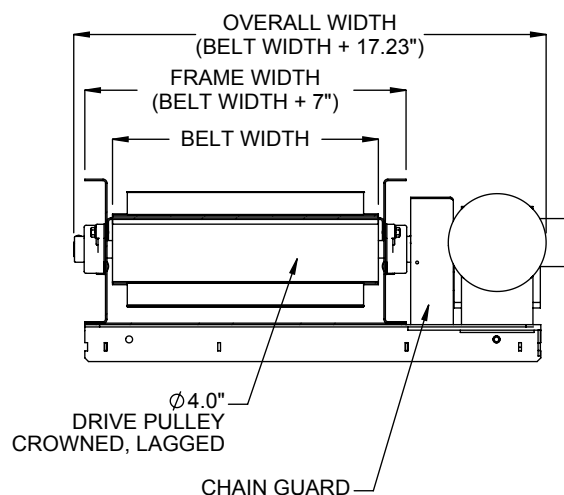

END DRIVE, SIDE, RIGHT HAND (SHOWN)  
END DRIVE, SIDE, LEFT HAND (OPPOSITE)

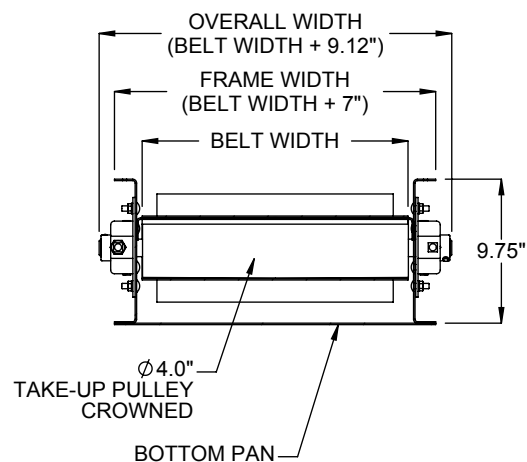

## SPECIFICATIONS

**BELT WIDTH:** 12", 18", 24", 30", 36"

**BEGINNING ELEVATION:** 8" - 126"

**LENGTH:** 60" - 240"

**ENDING ELEVATION:** 17" - 126"

**SPEED:** 15 - 150 FPM

**SUPPORT CENTER:** 0', 5', 10'

**INCLINED ANGLE:** 0 - 45°

**BELT:** Standard belt is PVC120 with 1-1/2" cleats on 12" centers. Optional belts include PVC120 with 1-1/2" cleats on 24" centers and white PVC food grade with 1-1/2" cleats on 12" or 24" centers.

**DRIVE:** Standard drive is an end drive, side, right hand. Optional drives include end drive, side, left hand; end drive and end drive top, right or left hand.

**MOTOR:** 1/2 HP through 1-1/2 HP. Energy efficient and inverter duty motors also available. Voltages include 120/1/60, 230/3/60, 460/3/60 and 575/3/60, , Brake, and DC Voltage.

**SUPPORT CENTERS:** Standard supports are floor supports on 10' centers. Optional on 5' centers.


**FRAME FINISH:** Standard finish is OSHA safety blue powder. Optional colors include green, beige, gray, orange, black and yellow.

**Model:** CMDSB - Cleated Medium Duty Slider Bed Belt Conveyor


REV

1


**LEWCO**

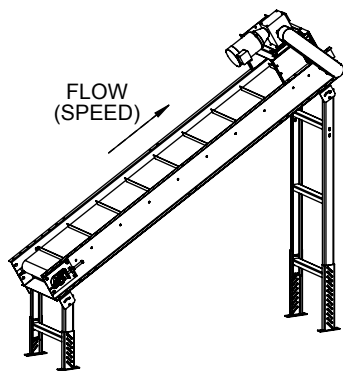


END DRIVE, TOP, RIGHT HAND (SHOWN)  
END DRIVE, TOP, LEFT HAND (OPPOSITE)

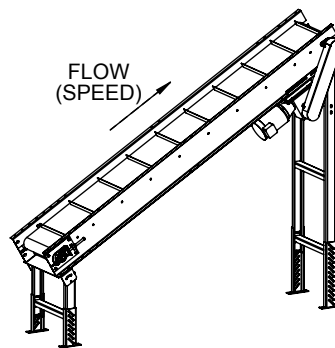


END DRIVE, BOTTOM, RIGHT HAND (SHOWN)  
END DRIVE, BOTTOM, LEFT HAND (OPPOSITE)

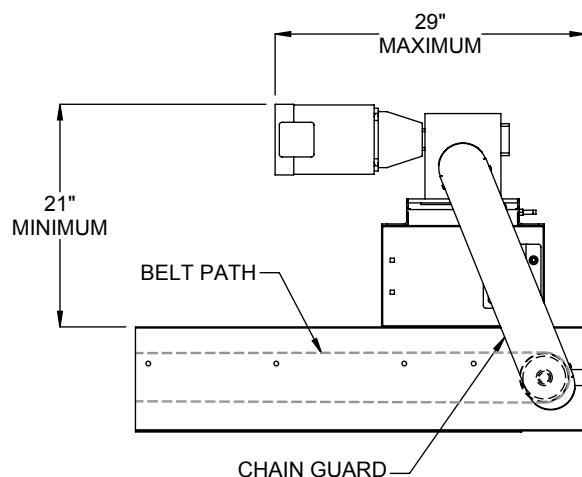


END DRIVE, TOP

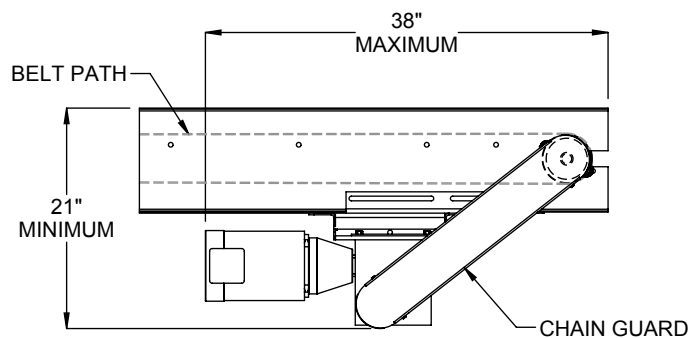

END DRIVE, BOTTOM

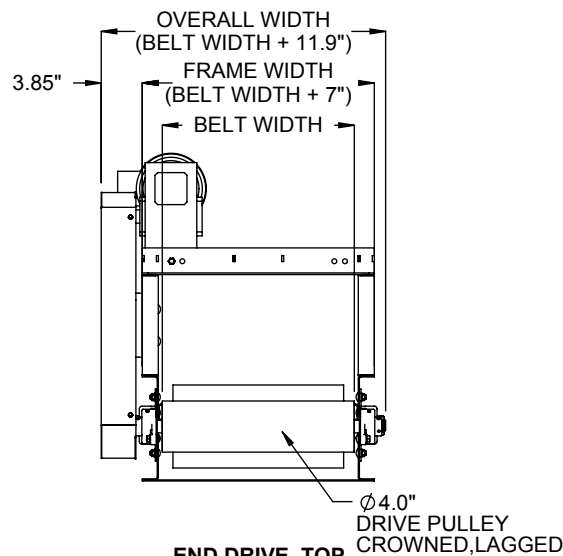

END DRIVE, TOP  
END VIEW

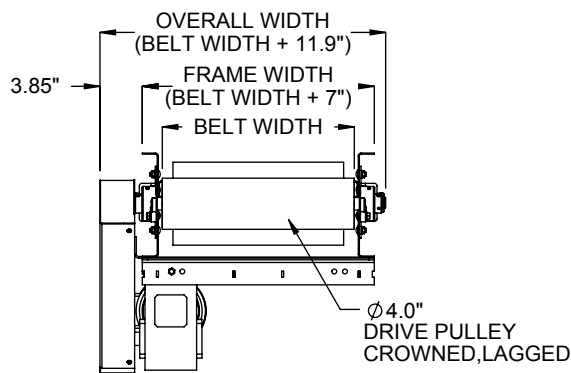

END DRIVE, BOTTOM  
END VIEW

**LOAD CAPACITY @ 60 FPM & 25° INCLINED ANGLE (LBS)**

| HP    | WIDTH |     |     |     |     |
|-------|-------|-----|-----|-----|-----|
|       | 12"   | 18" | 24" | 30" | 36" |
| 1/2   | 160   | 155 | 150 | 145 | 140 |
| 3/4   | 240   | 235 | 230 | 225 | 220 |
| 1     | 320   | 315 | 310 | 305 | 300 |
| 1 1/2 | 485   | 480 | 475 | 470 | 465 |

**LOAD CAPACITY @ 30 FPM & 25° INCLINED ANGLE (LBS)**

| HP    | WIDTH |     |     |     |     |
|-------|-------|-----|-----|-----|-----|
|       | 12"   | 18" | 24" | 30" | 36" |
| 1/2   | 325   | 320 | 315 | 310 | 305 |
| 3/4   | 485   | 480 | 475 | 470 | 465 |
| 1     | 650   | 645 | 640 | 635 | 630 |
| 1 1/2 | -     | 970 | 965 | 960 | 955 |

**MAXIMUM LOAD PER LINEAR FOOT OF CONVEYOR  
IS 100 POUNDS - NOT TO EXCEED CAPACITY ABOVE**