
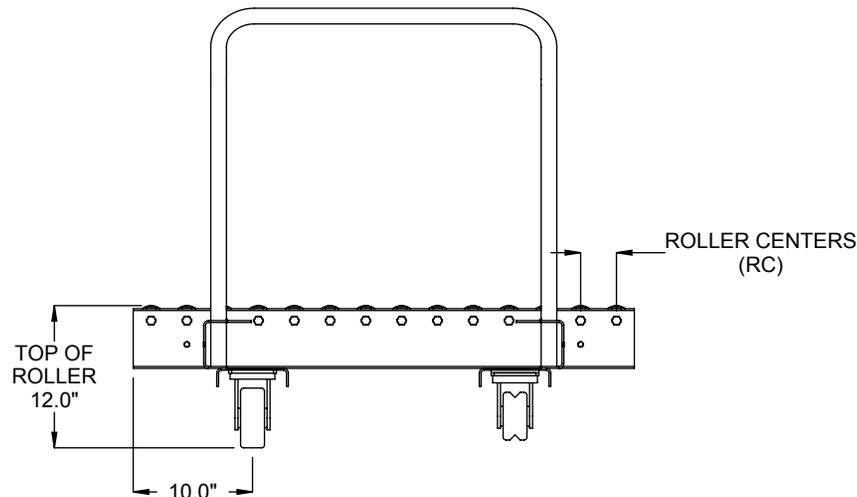


FRAME OPTION:

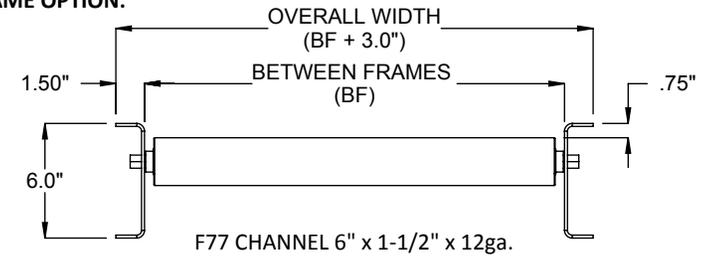

### SPECIFICATIONS

<b>BETWEEN FRAMES:</b> 15" - 61"	<b>LENGTH:</b> 60" - 120"
<b>ROLLER CENTERS:</b> 3", 4", 5", 6", 9", 12"	
<b>ROLLERS:</b> 2.5" dia., 11ga wall tubes with 11/16" hex cold rolled steel axle, spring retained. Standard A50 bearings are light oil lubricated. Optional bearings include combinations of precision, semi-precision and non-precision construction with light oil or grease packed lubrication. 750 lbs roller capacity.	
<b>FRAMES:</b> Standard F76 set high 5" x 1-1/2" x 12ga formed steel channel with bolted 1-1/8" x 1/8" angle crossties. <u>Optional</u> F77 set low 6" x 1-1/2" x 12ga.	
<b>ROLL COVERS:</b> Standard carbon steel. <u>Optional</u> Orange Polyurethane, 1/8" wall or galvanized tube.	
<b>CASTERS:</b> 4" cast iron V-groove and 5" phenolic.	
<b>HANDLE:</b> 1" pipe with hand grip.	
<b>FRAME FINISH:</b> Standard finish is OSHA safety blue powder. <u>Optional</u> colors include green, beige, gray, orange, black and yellow.	

**Model:** PTTC25 - Pass Thru Transfer Car, 2.5" diameter 11 gauge roller