



SECTION A-A

FRAME OPTIONS:

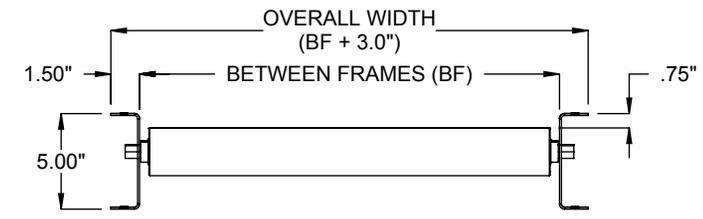

F39 CHANNEL, 4-1/2"x1-1/2"x12ga

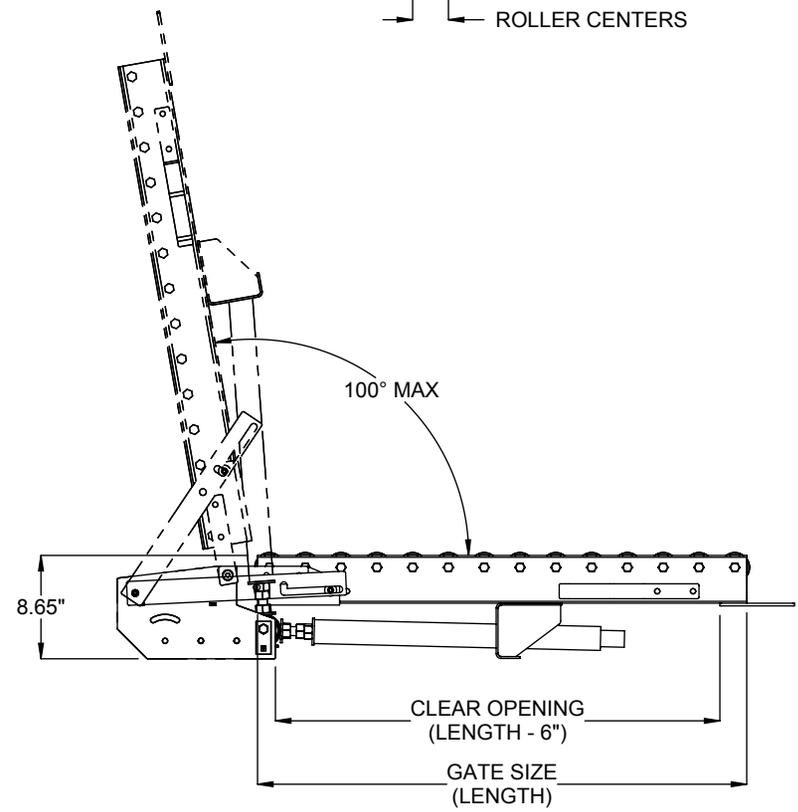

SPECIFICATIONS

BETWEEN FRAMES: 6" - 39"	LENGTH: 36", 42", 48"
ROLLER CENTERS: 3", 4.5", 6"	
ROLLERS: 2.5" dia., with 11/16" hex cold rolled steel axles, spring retained. Standard A50 bearings, oiled 425 lbs., 11ga roller.	
FRAMES: Standard F96 set high 4" x 1-1/2" x 8ga formed steel channel. <u>Optional</u> F39 set low 5" x 1-1/2" x 8ga.	
ROLL COVERS: Standard carbon steel. <u>Optional</u> roll covers include Orange Polyurethane, 1/8" wall or galvanized tubes.	
COUPLINGS: Can be connected to the same model conveyor with matching frame option and matching between frame dimension.	
FRAME FINISH: Standard finish is OSHA safety blue powder. <u>Optional</u> colors include green, beige, gray, orange, black and yellow.	

Model: HS2511 - Spring Assisted Hinge Gate, 2.5 diameter roller 11 gauge

REV	
0	