

SPECIFICATIONS

BETWEEN FRAMES: 10.375" - 90"

ROLLER CONSTRUCTION: 3.50" dia. x 0.30" wall, bare carbon steel.

SPROCKETS: #60 "A" plate with 20 teeth, heat treated.

BEARINGS: (A80) Precision, grease packed, ABEC-1 with steel cup, 1" hex axle, front & back seals, rated for - 10 °F to 225 °F.


AXLE RETENTION: Cotter pins.

LOAD CAPACITY: 2000 LBS. * Based on 90" B.F. with an evenly distributed load. Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel
- (V97) Zinc Plated Carbon Steel
- (V43) Orange Polyurethane, 1/8" Thick (Carbon steel tube)

NOTE: Axle & Sprocket are carbon steel unless specified otherwise.

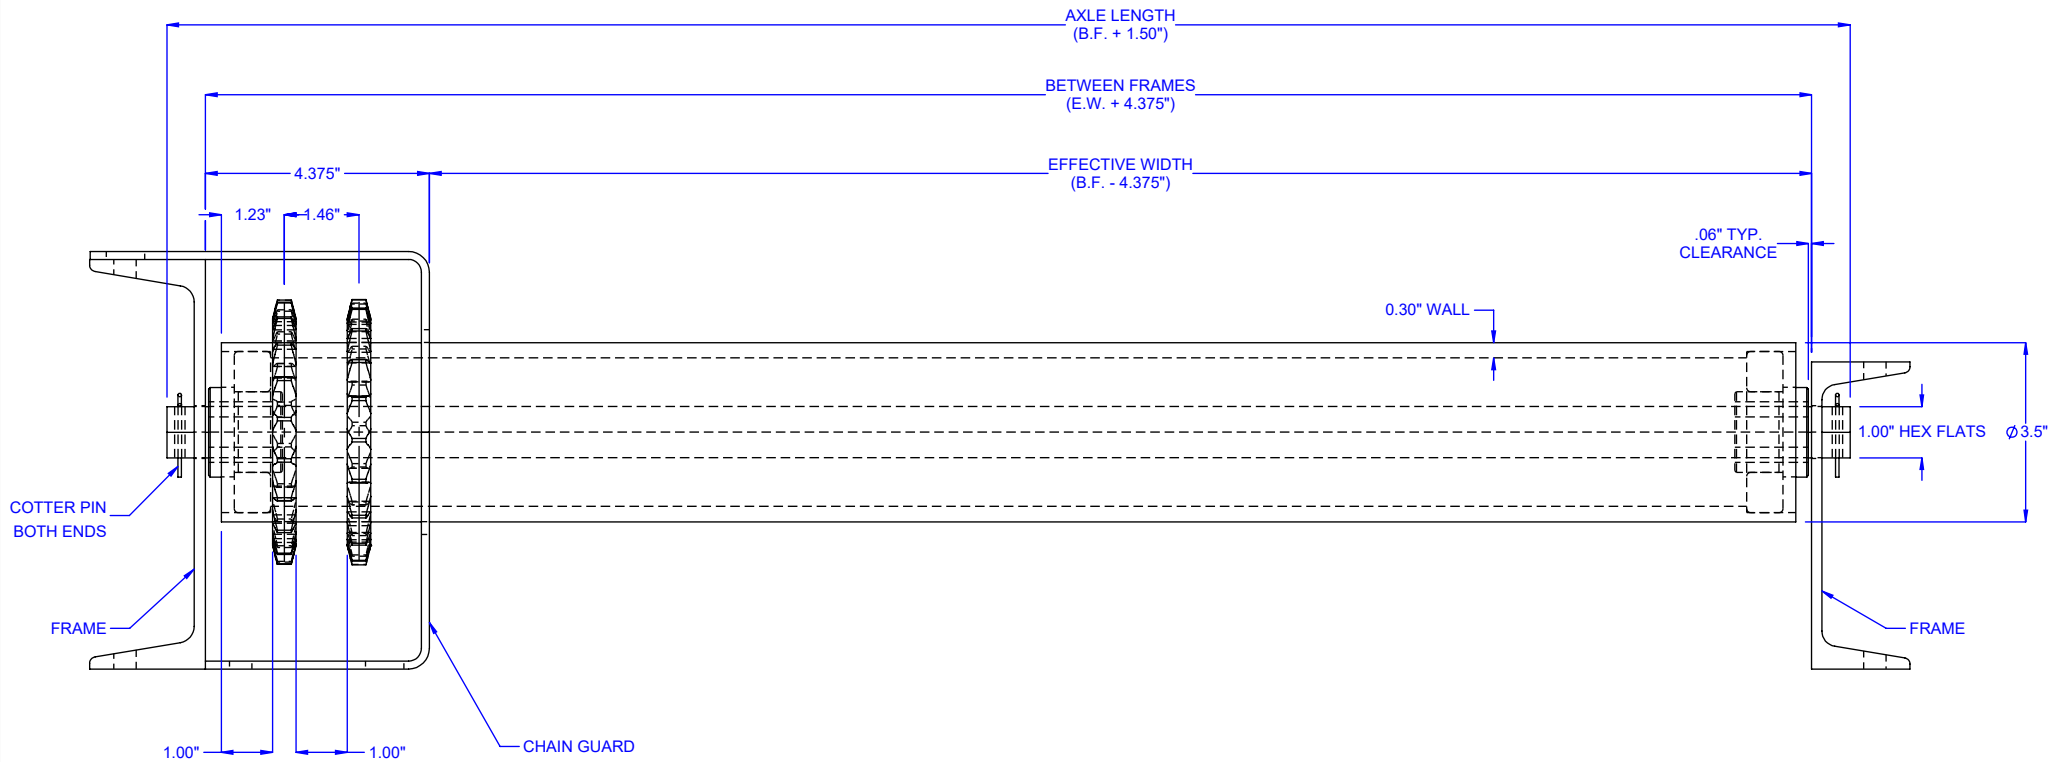

MODEL: R3530S-A80

PART #: CVS0730-A80-*

DESCRIPTION: SPROCKETED ROLLER, 3.5" DIA. X 0.30" WALL

LEWCO, INC. IS COMMITTED TO CONTINUOUS IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.

THIS DRAWING MUST NOT BE COPIED, REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.



706 LANE ST. SANDUSKY, OH 44870, U.S.A.