

SPECIFICATIONS

BETWEEN FRAMES: 10.375" - 51"

ROLLER CONSTRUCTION: 1.9" dia. x 12ga. wall, bare carbon steel, pickled & oiled.

SPROCKETS: #40 "A" plate with 18 teeth, heat treated.


BEARINGS: (A24) Precision, grease packed, ABEC-1 with steel cup, 7/16" hex axle, front & back rubber seals, rated for - 4 °F to 150 °F. Other options available.

LOAD CAPACITY: 260 LBS. * Based on 51" B.F. with an evenly distributed load. Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V71) Galvanized Steel
- (V80) Stainless Steel Tube & Axle
- (V97) Zinc Plated Carbon Steel
- (V41) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
- (V10) Black UHMW ULTREX® Sleeves, 2-3/8" O.D. (Carbon steel tube)

NOTE: Drive Shaft & Sprockets are carbon steel unless specified otherwise.

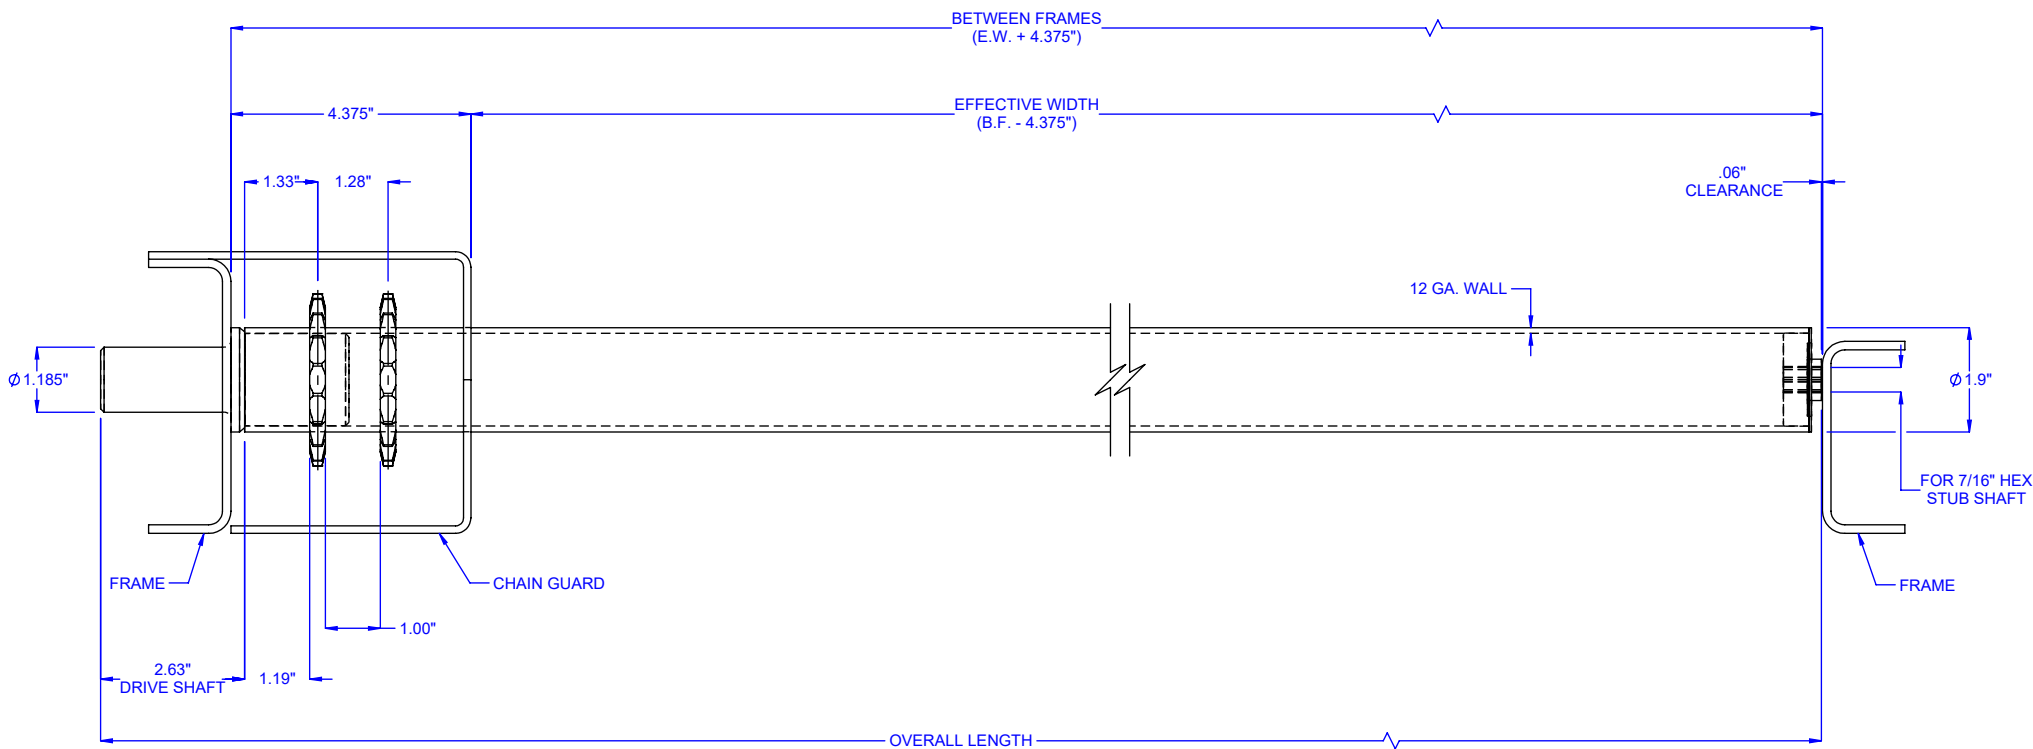

MODEL: R1912SD-A24-*

PART #: CVS3069-A24-*

LEWCO, INC. IS COMMITTED TO CONTINUOUS IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.

DESCRIPTION: SPROCKETED DRIVE ROLLER, 1.9" DIA. X 12 GA. WALL

THIS DRAWING MUST NOT BE COPIED, REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.

