

**SPECIFICATIONS**

**BETWEEN FRAMES:** 10.375" - 90"

**ROLLER CONSTRUCTION:** 3.50" dia. x 0.30" wall, bare carbon steel.


**SPROCKETS:** #60 "A" plate with 20 teeth, heat treated.

**LOAD CAPACITY:** 2000 LBS. \* Based on 90" B.F. with an evenly distributed load.  
Roller capacity may be limited to conveyor frame capacity.

**ROLLER TUBE MATERIAL & COVER OPTIONS:**

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V97) Zinc Plated Carbon Steel
- (V43) Orange Polyurethane, 1/8" Thick (Carbon steel tube)

**NOTE:** Drive Shaft & Sprockets are carbon steel unless specified otherwise.

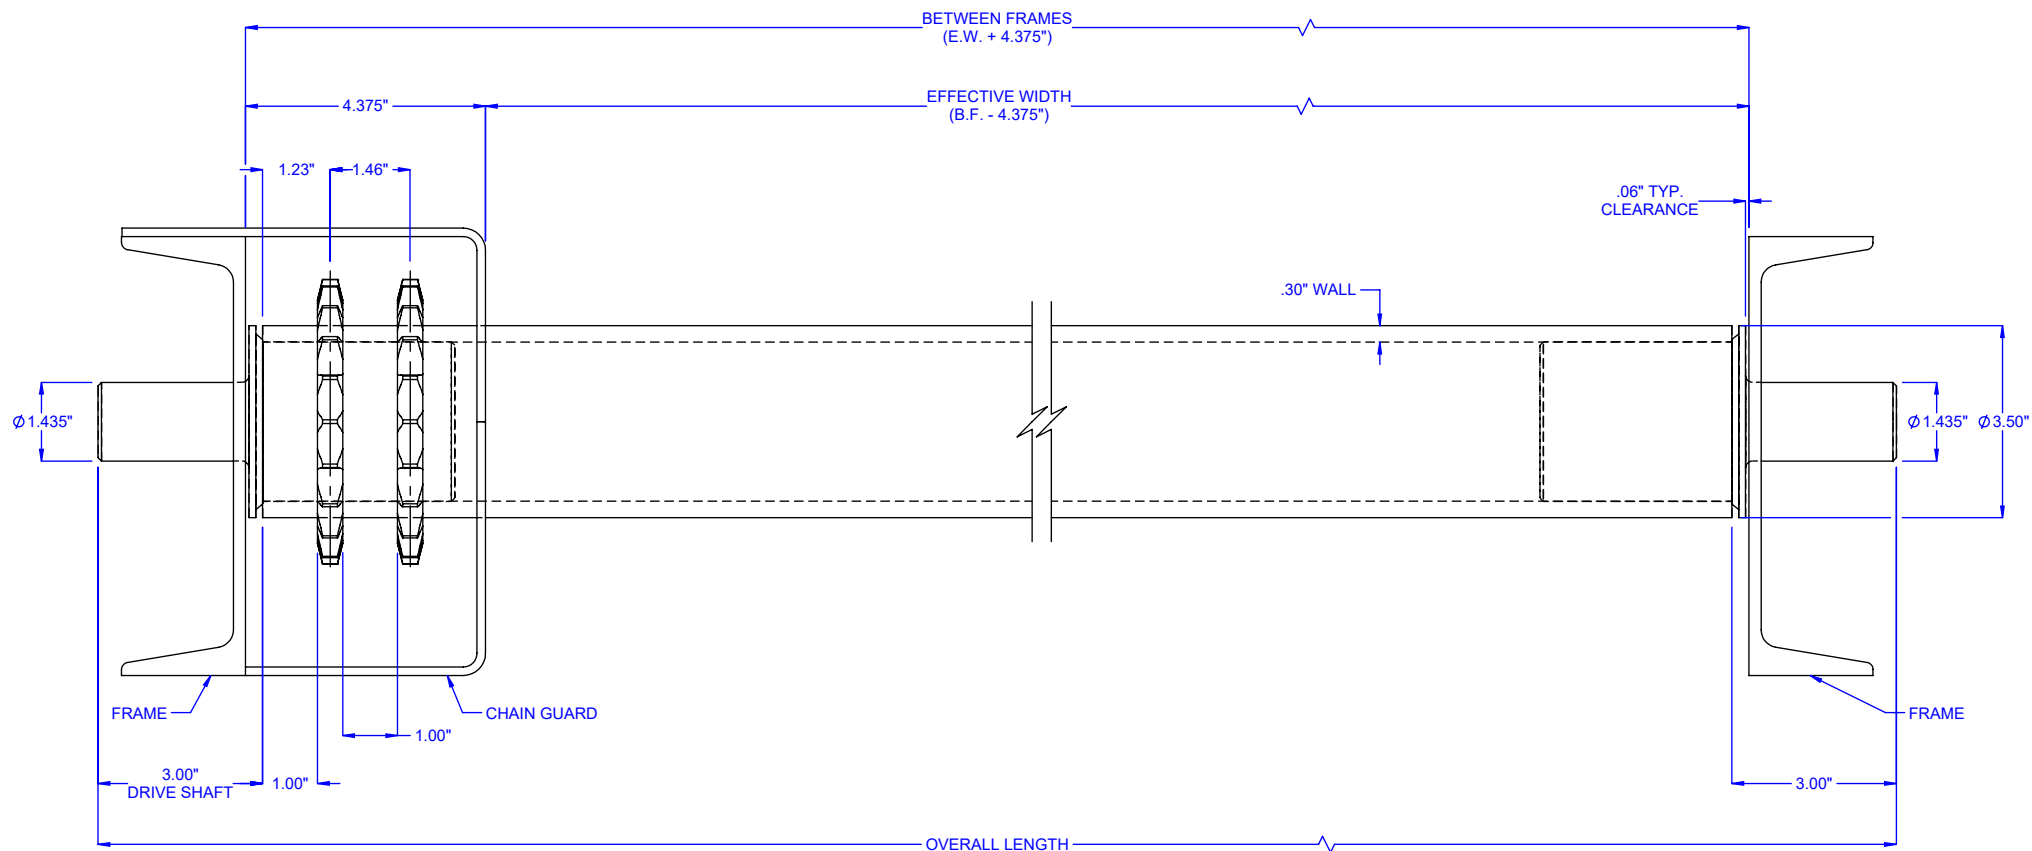

**MODEL:** R3530SD-\*

**PART #:** CVS3931-\*

LEWCO, INC. IS COMMITTED TO CONTINUOUS IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.

**DESCRIPTION:** SPROCKETED LIVE AXLE ROLLER, 3.5" DIA. X 0.30" WALL

THIS DRAWING MUST NOT BE COPIED, REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.

