

**SPECIFICATIONS**

**BETWEEN FRAMES:** 10.375" - 51"


**ROLLER CONSTRUCTION:** 1.9" dia. x 9ga. wall, bare carbon steel, pickled & oiled.

**SPROCKETS:** #40 "A" plate with 18 teeth, heat treated.

**LOAD CAPACITY:** 300 LBS. \* Based on 51" B.F. with an evenly distributed load. Roller capacity may be limited to conveyor frame capacity.

**ROLLER TUBE MATERIAL & COVER OPTIONS:**

- (V98) Standard - Bare Carbon Steel, Pickled & Oiled
  - (V80) Stainless Steel Tube & Axle
  - (V97) Zinc Plated Carbon Steel
  - (V41) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
  - (V10) Black UHMW ULTREX® Sleeves, 2-3/8" O.D. (Carbon steel tube)
- NOTE:** Drive Shaft & Sprockets are carbon steel unless specified otherwise.

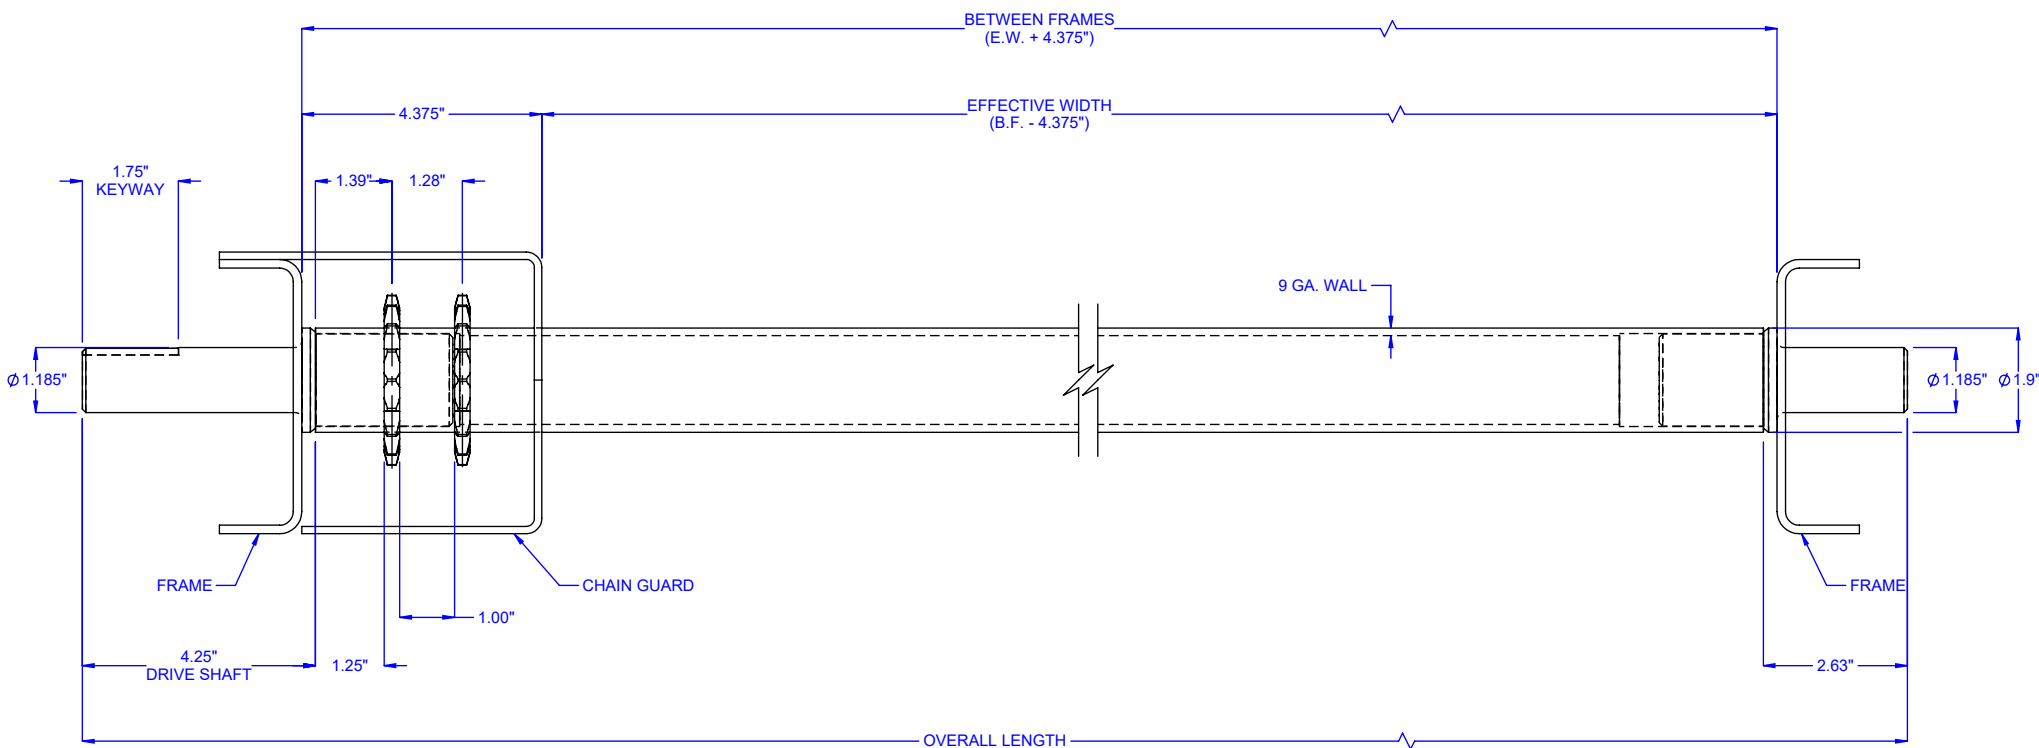

**MODEL:** R1909SD-\*

**PART #:** CVS6017-\*

LEWCO, INC. IS COMMITTED TO CONTINUOUS IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.

**DESCRIPTION:** SPROCKETED LIVE AXLE ROLLER, 1.9" DIA. X 9 GA. WALL

THIS DRAWING MUST NOT BE COPIED, REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.



706 LANE ST. SANDUSKY, OH 44870, U.S.A.