

**SPECIFICATIONS**

**BETWEEN FRAMES:** 10.375" - 61"

**ROLLER CONSTRUCTION:** 2.6" dia. x 7ga. wall, bare carbon steel, pickled & oiled.


**SPROCKETS:** #60 "A" plate with 15 teeth, heat treated.

**LOAD CAPACITY:** 750 LBS. \* Based on 61" B.F. with an evenly distributed load. Roller capacity may be limited to conveyor frame capacity.

**ROLLER TUBE MATERIAL & COVER OPTIONS:**

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V97) Zinc Plated Carbon Steel
- (V42) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
- (V11) Black UHMW ULTREX® Sleeves, 3" O.D. (Carbon steel tube)

**NOTE:** Drive Shaft & Sprockets are carbon steel unless specified otherwise.

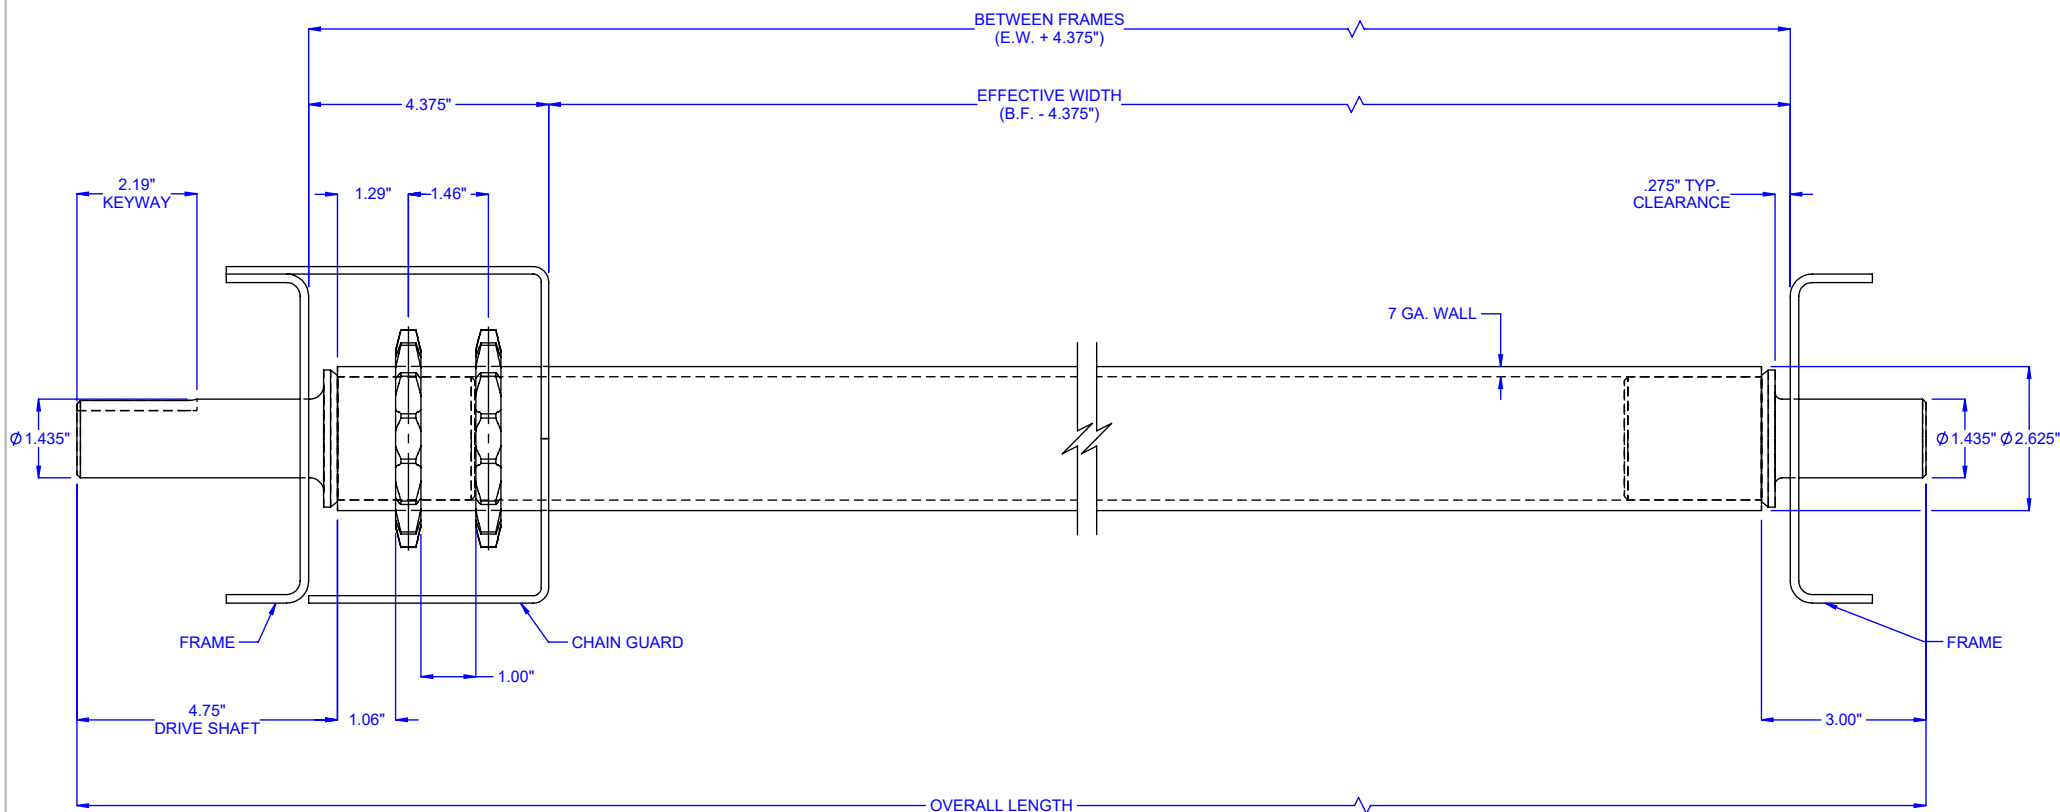

**MODEL:** R2607SD-\*

**PART #:** CVS6020-\*

LEWCO, INC. IS COMMITTED TO CONTINUOUS IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.

**DESCRIPTION:** SPROCKETED LIVE AXLE ROLLER, 2.6" DIA. X 7 GA. WALL

THIS DRAWING MUST NOT BE COPIED, REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.

