

Chain Driven Live Roller Conveyors



Effective Width

• 12" to 60"

Length

• 48" to 600"

Roller Centers

- 3"
- For other spacing see CDLR25

Rollers

- 2.50" dia. X 11ga. mild steel tube with 11/16" hex axle, spring retained, with precision, greased packed ABEC bearings, and #60 sprockets.
- Optional:
 - o Galvanized roller tube
 - Polyurethane roller sleeve
 - $\circ \quad \text{Ultrex accumulation sleeves}$

Frame Construction

- Structural channel, 6"x8.2# with rollers set 1-3/4" low
- Optional:
 - Formed 6"x8ga. channel with rollers set 1-3/4" low (welded frame)

Model: CDDB25

Chain Driven Roller, Dual Chain Box, 2.5" dia.

Chain driven roller conveyor is the workhorse of heavy-duty material handling and is an excellent choice for moving pallets, tires, drums, structural steel, and other heavy loads. Its rugged welded frame construction can withstand the most abusive of environments. Chain driven roller conveyor also provides versatility in production lines because it can easily incorporate with chain transfers, turntables, and curves.

Drive Location

- Standard drive is mounted high near center of conveyor length on chain box side.
- Optional:
 - Drive mounted low near center

Motor

- 1/2 HP to 2 HP
- Totally Enclosed Fan Cooled motor
- Optional:
 - o Inverter Duty motor
 - Power Off Brake motor
- Voltage: 230/460/ 3Ph/ 60hz
- Optional:
 - 115V/ 1Ph/ 60Hz
 - 208V/ 1Ph/ 60Hz
 - 230V/ 1Ph/ 60Hz
 - 575V/ 3Ph/ 60Hz
 - o 24VDC

Speed

• 10 to 120 FPM (feet per minute)

Control Options

- Variable Speed Controller
- Combination motor starter with disconnect, fixed speed
- Combination motor starter with disconnect, variable speed
- PLC with HMI
- No controls (provided by others)

Conveyor Color

- Blue (RAL 5017)
- Guards are yellow (RAL 1023)
- Moving parts are bright red orange (RAL 2008).
- Optional:
 - Light Gray (RAL 7035)
 - Repose Gray (not an RAL)
 - o Patina Green (RAL 6000)
 - Signal White (RAL 9003)
 - Jet Black (RAL 9005)
 - Flat Black (not an RAL)
 - Custom colors available


Additional Options


- Conveyor Supports
- Guardrail
- Fork Truck Barriers
- Photo Eye Sensor(s)
- Custom sizes and features available. Please consult a LEWCO Applications Engineer for more information.


Quality Assurance

- Each unit comes complete with a (1) year warranty and is tested prior to shipment.
- Manufactured under ISO 9001 Quality Certified System.




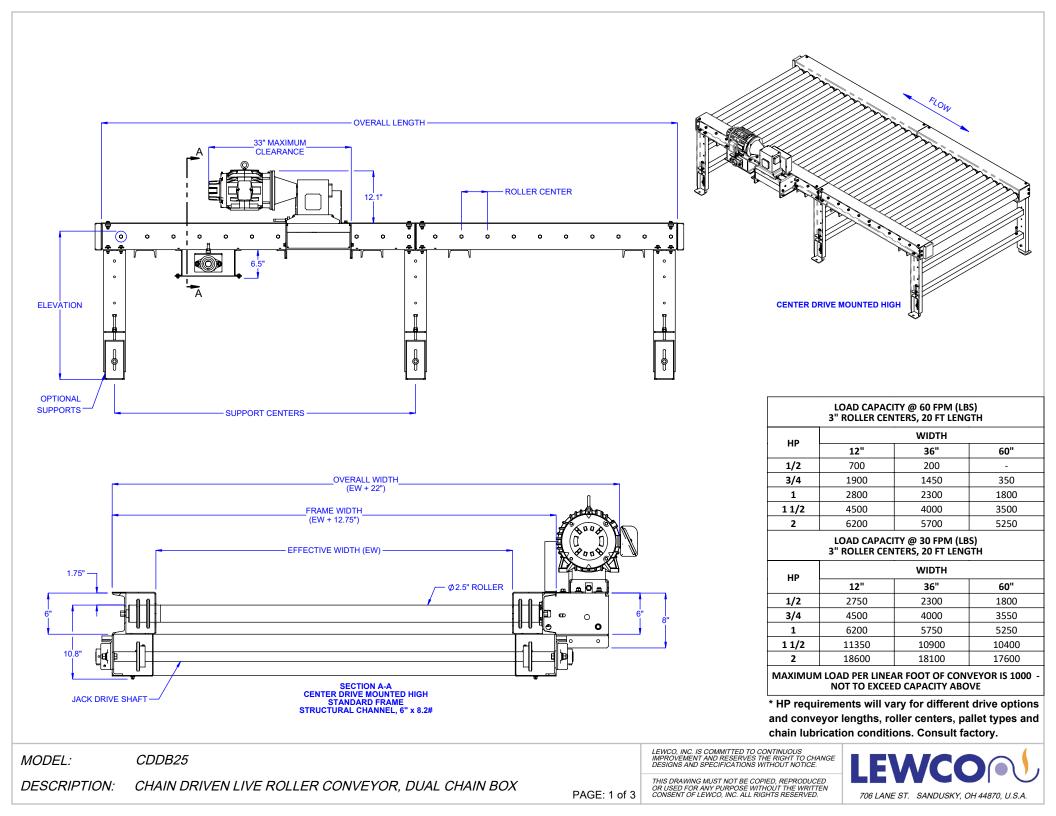

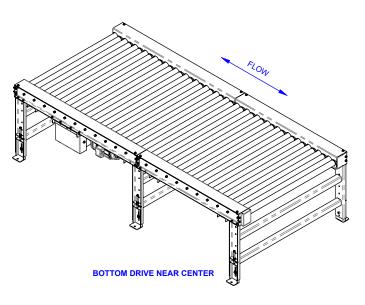


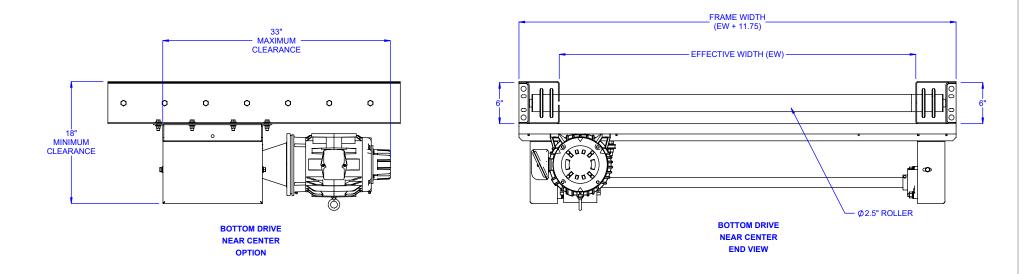



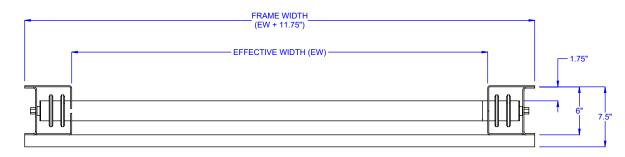

OPTIONAL FRAME FORMED 8 GA. CHANNEL, 6" x 1-1/2"



OPTIONAL GUARDRAIL

MODEL:	CDDB25		LEWCO, INC. IS COMMITTED TO CONTINUOUS IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.	IEWCO
DESCRIPTION:	CHAIN DRIVEN LIVE ROLLER CONVEYOR, DUAL CHAIN BOX	PAGE: 3 of 3	THIS DRAWING MUST NOT BE COPIED, REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.	706 LANE ST. SANDUSKY, OH 44870, U.S.A.