




LOAD CAPACITY: 2500 LB. MAXIMUM DISTRIBUTED LOAD FOR ONE CROSSTIE
UP TO 48" BETWEEN UPRIGHTS.

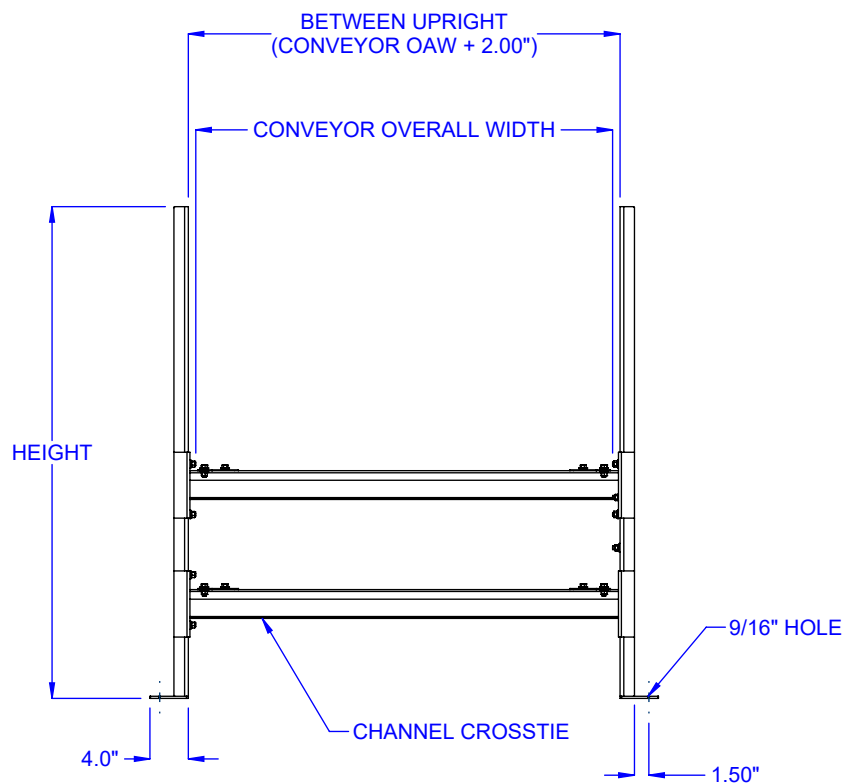

FRONT VIEW



SIDE VIEW

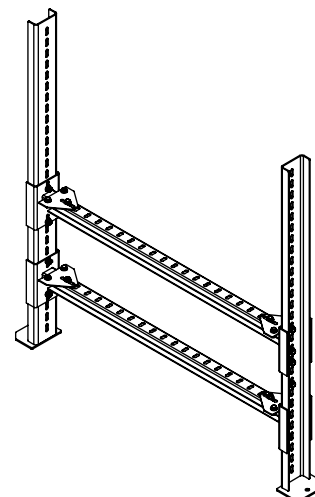

MTH: HEIGHT RANGE

MODEL	MIN.	MAX.	MODEL	MIN.	MAX.	MODEL	MIN.	MAX.
MTH21	5.5"	18.0"	MTH51	5.5"	48.0"	MTH81	5.5"	78.0"
MTH27	5.5"	24.0"	MTH57	5.5"	54.0"	MTH87	5.5"	84.0"
MTH33	5.5"	30.0"	MTH63	5.5"	60.0"	MTH93	5.5"	90.0"
MTH39	5.5"	36.0"	MTH69	5.5"	66.0"	MTH99	5.5"	96.0"
MTH45	5.5"	42.0"	MTH75	5.5"	72.0"	MTH105	5.5"	102.0"

SPECIFICATIONS

OVERALL HEIGHT: 21", 27", 33", 39", 45", 51", 57", 63", 69", 75", 81", 87", 93", 99", 105"

BETWEEN UPRIGHT: 10" - 64"

NUMBER OF TIERS: 1, 2, 3, 4, 5

CONSTRUCTION: Formed upright channels, 8ga; Welded channel crosstie, 12ga bolted assembly; Base plate, 4ga.

FINISH: Powder coated blue (RAL 5017). Other colors available.

MODEL: MTH

DESCRIPTION: Multi-Tier Beam Style Support

LEWCO, INC. IS COMMITTED TO CONTINUOUS
IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE
DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.

THIS DRAWING MUST NOT BE COPIED, REPRODUCED
OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN
CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.

LEWCO

706 LANE ST. SANDUSKY, OH 44870, U.S.A.