

SPECIFICATIONS

BETWEEN FRAMES: 10.375" - 68.375"

ROLLER CONSTRUCTION: 2.5" dia. x 11ga. wall, bare carbon steel, pickled & oiled.


SPROCKETS: #60 "A" plate with 15 teeth, heat treated.

LOAD CAPACITY: 750 LBS. * Based on 61" B.F. with an evenly distributed load.
Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V73) Galvanized Steel
- (V83) Stainless Steel Tube & Drive Shaft
- (V97) Zinc Plated Carbon Steel
- (V42) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
- (V11) Black UHMW ULTREX® Sleeves, 3" O.D., Slip Fit (Carbon steel tube)

NOTE: Drive Shaft & Sprockets are carbon steel unless specified otherwise.

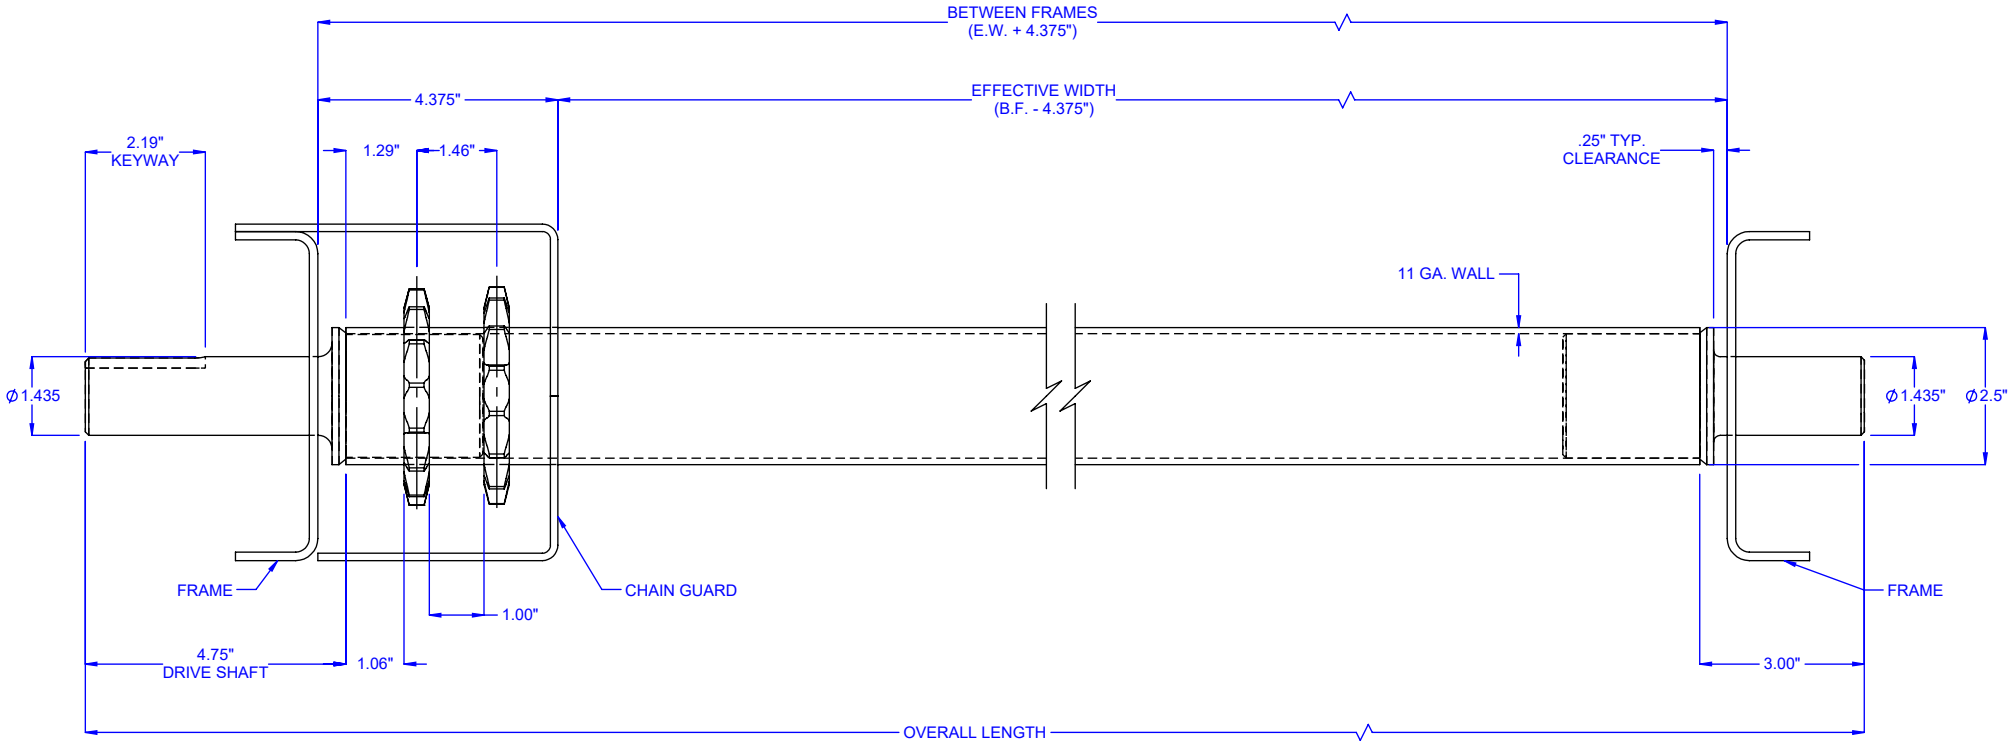

MODEL: R2511SD-*

PART #: CVS2900-*

DESCRIPTION: SPROCKETED LIVE AXLE ROLLER, 2.5" DIA. X 11 GA. WALL