

SPECIFICATIONS

BETWEEN FRAMES: 10.375" - 52.375"

ROLLER CONSTRUCTION: 1.9" dia. x 12ga. wall, bare carbon steel, pickled & oiled.

SPROCKETS: #40 "A" plate with 18 teeth, heat treated.


BEARINGS: (A24) Precision, grease packed, ABEC-1 with steel cup, 7/16" hex axle, front & back rubber seals, rated for - 4 °F to 150 °F. Other options available.

LOAD CAPACITY: 260 LBS. * Based on 51" B.F. with an evenly distributed load. Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V71) Galvanized Steel
- (V80) Stainless Steel Tube & Axle
- (V97) Zinc Plated Carbon Steel
- (V41) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
- (V10) Black UHMW ULTREX® Sleeves, 2-3/8" O.D., Slip Fit (Carbon steel tube)

NOTE: Drive Shaft & Sprockets are carbon steel unless specified otherwise.

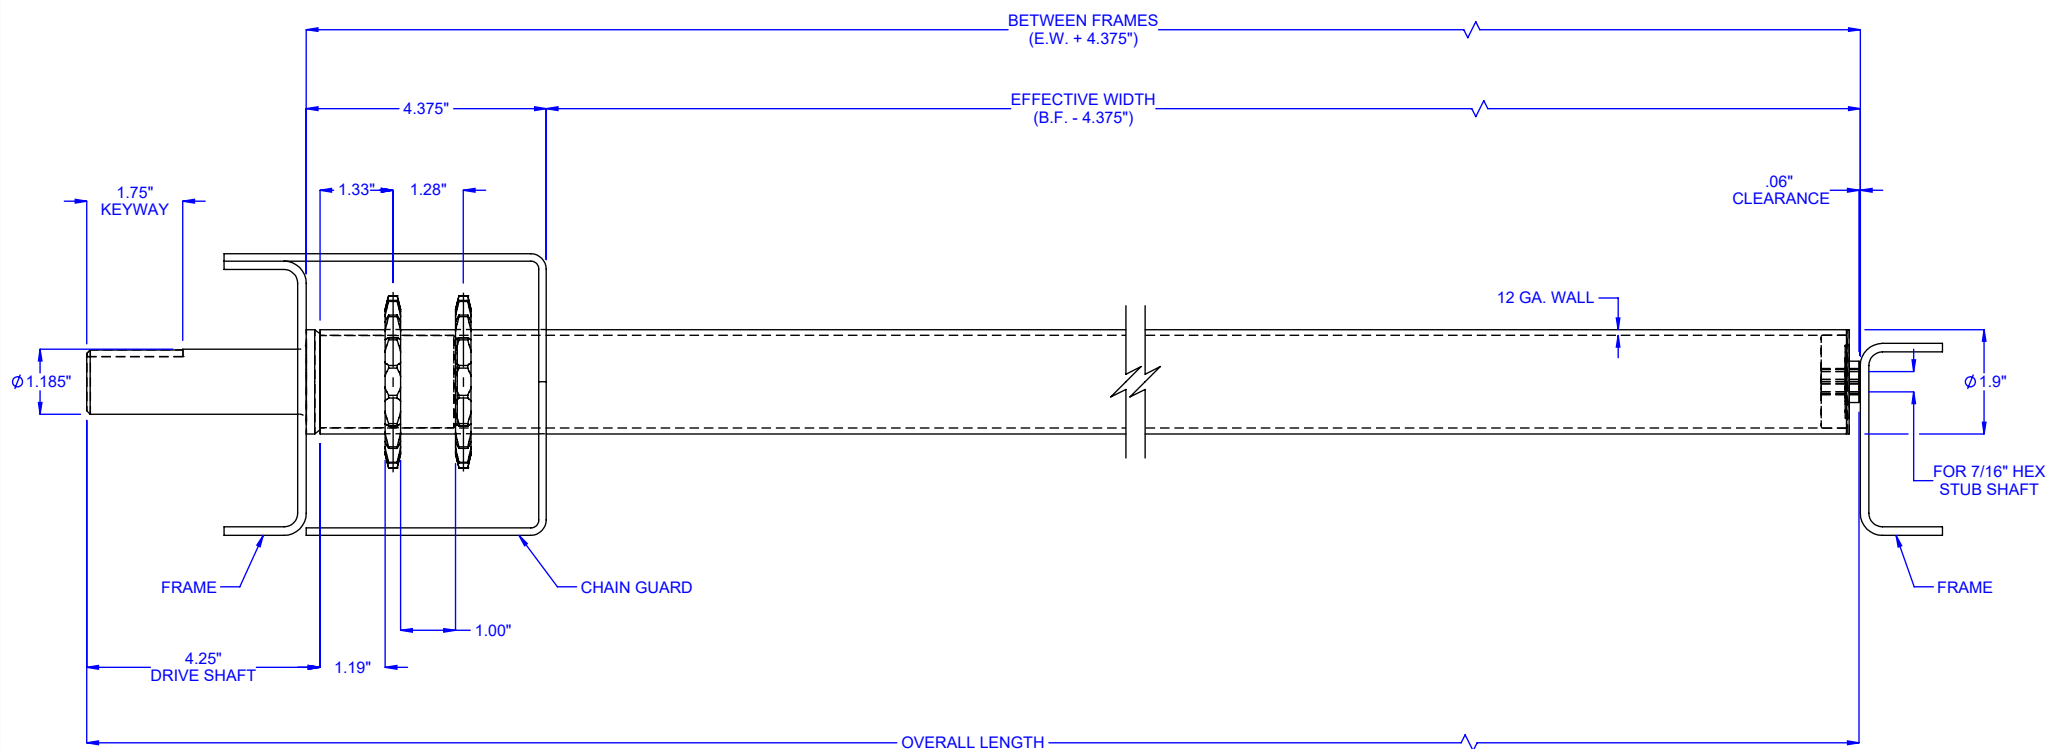

MODEL: R1912SD-A24-*

PART #: CVS3056-A24-*

DESCRIPTION: SPROCKETED DRIVE ROLLER, 1.9" DIA. X 12 GA. WALL

PAGE: 1 of 1

LEWCO, INC. IS COMMITTED TO CONTINUOUS IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.

THIS DRAWING MUST NOT BE COPIED, REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.

LEWCO

706 LANE ST. SANDUSKY, OH 44870, U.S.A.