

SPECIFICATIONS

BETWEEN FRAMES: 10.375" - 52.375"

ROLLER CONSTRUCTION: 1.9" dia. x 9ga. wall, bare carbon steel, pickled & oiled.


SPROCKETS: #40 "A" plate with 18 teeth, heat treated.

LOAD CAPACITY: 300 LBS. * Based on 51" B.F. with an evenly distributed load.
Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V80) Stainless Steel Tube & Axle
- (V97) Zinc Plated Carbon Steel
- (V41) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
- (V10) Black UHMW ULTREX® Sleeves, 2-3/8" O.D., Slip Fit (Carbon steel tube)

NOTE: Drive Shaft & Sprockets are carbon steel unless specified otherwise.

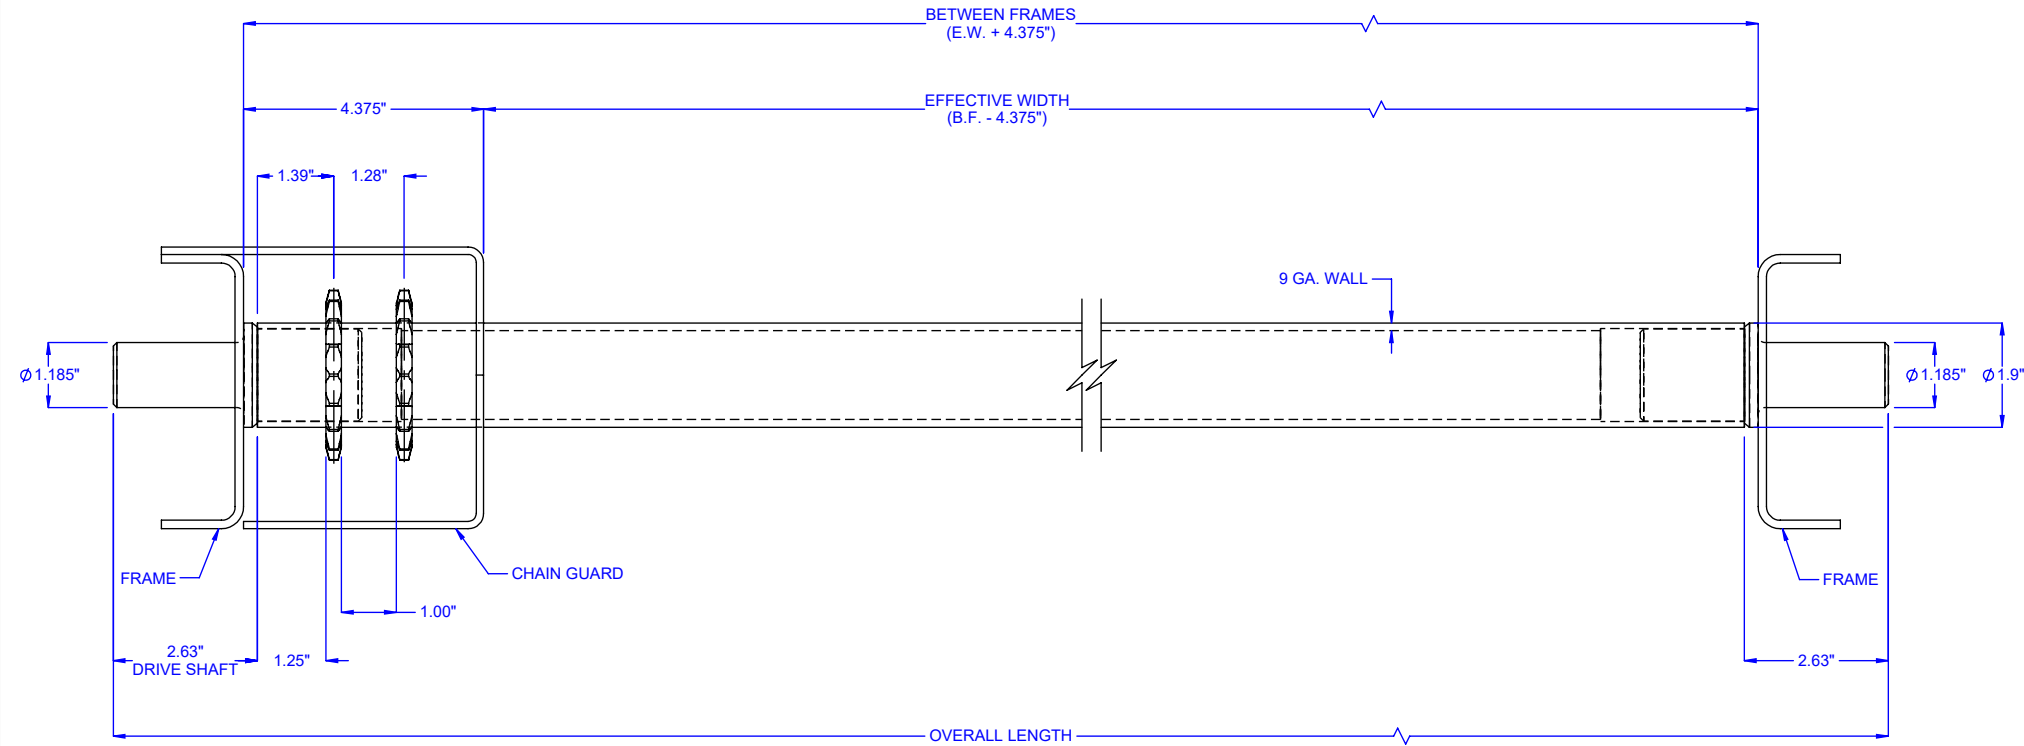

MODEL: R1909SD-*

PART #: CVS6018-*

DESCRIPTION: SPROCKETED LIVE AXLE ROLLER, 1.9" DIA. X 9 GA. WALL