

SPECIFICATIONS

BETWEEN FRAMES: 10.375" - 51"

ROLLER CONSTRUCTION: 1.9" dia. x 16ga. wall, bare carbon steel, pickled & oiled.

SHEAVE: Carbon Steel, 8 Grooves (For two 4-Rib Belts)

BEARINGS: (A6151) Precision, grease packed, ABEC-1 with steel cup, 7/16" hex axle, front & back rubber seals, rated for - 4 °F to 150 °F. Other options available.


AXLE RETENTION: 3" long spring, one side. Optional cotter pins.

LOAD CAPACITY: 250 LBS. * Based on 51" B.F. with an evenly distributed load.
Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V71) Galvanized Steel
- (V80) Stainless Steel Tube & Axle
- (V97) Zinc Plated Carbon Steel
- (V41) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
- (V10) Black UHMW ULTREX® Sleeves, 2-3/8" O.D., Slip Fit (Carbon steel tube)

NOTE: Axle & Sheave are carbon steel unless specified otherwise.

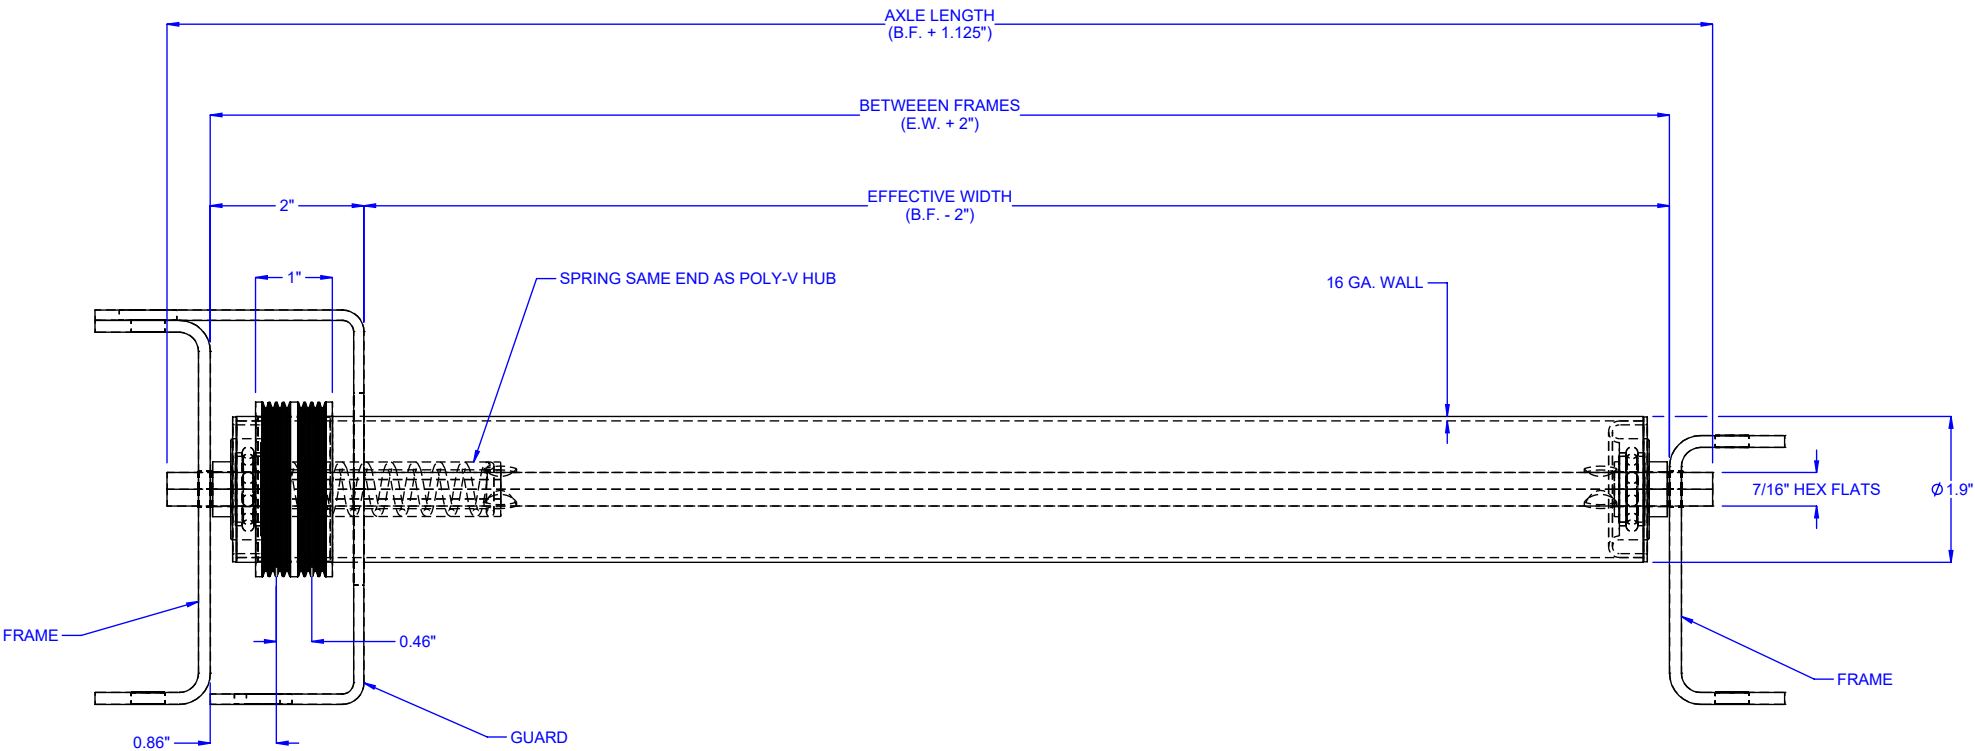

MODEL: R1916PLV-A6151

PART #: CV0040444-A6151

DESCRIPTION: SPROCKETED ROLLER, 1.9" DIA. X 16 GA. WALL