

SPECIFICATIONS

BETWEEN FRAMES: 10.375" - 52.375"

ROLLER CONSTRUCTION: 1.9" dia. x 12ga. wall, bare carbon steel, pickled & oiled.

SPROCKETS: #40 "A" plate with 18 teeth, heat treated.

BEARINGS: (A24) Precision, grease packed, ABEC-1 with steel cup, 7/16" hex axle, front & back rubber seals, rated for - 4 °F to 150 °F. Other options available.


AXLE RETENTION: 3" long spring, one side. Optional cotter pins.

LOAD CAPACITY: 260 LBS. * Based on 51" B.F. with an evenly distributed load.
Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V71) Galvanized Steel
- (V81) Stainless Steel Tube & Axle
- (V97) Zinc Plated Carbon Steel
- (V41) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
- (V10) Black UHMW ULTREX® Sleeves, 2-3/8" O.D., Slip Fit (Carbon steel tube)

NOTE: Axle & Sprocket are carbon steel unless specified otherwise.

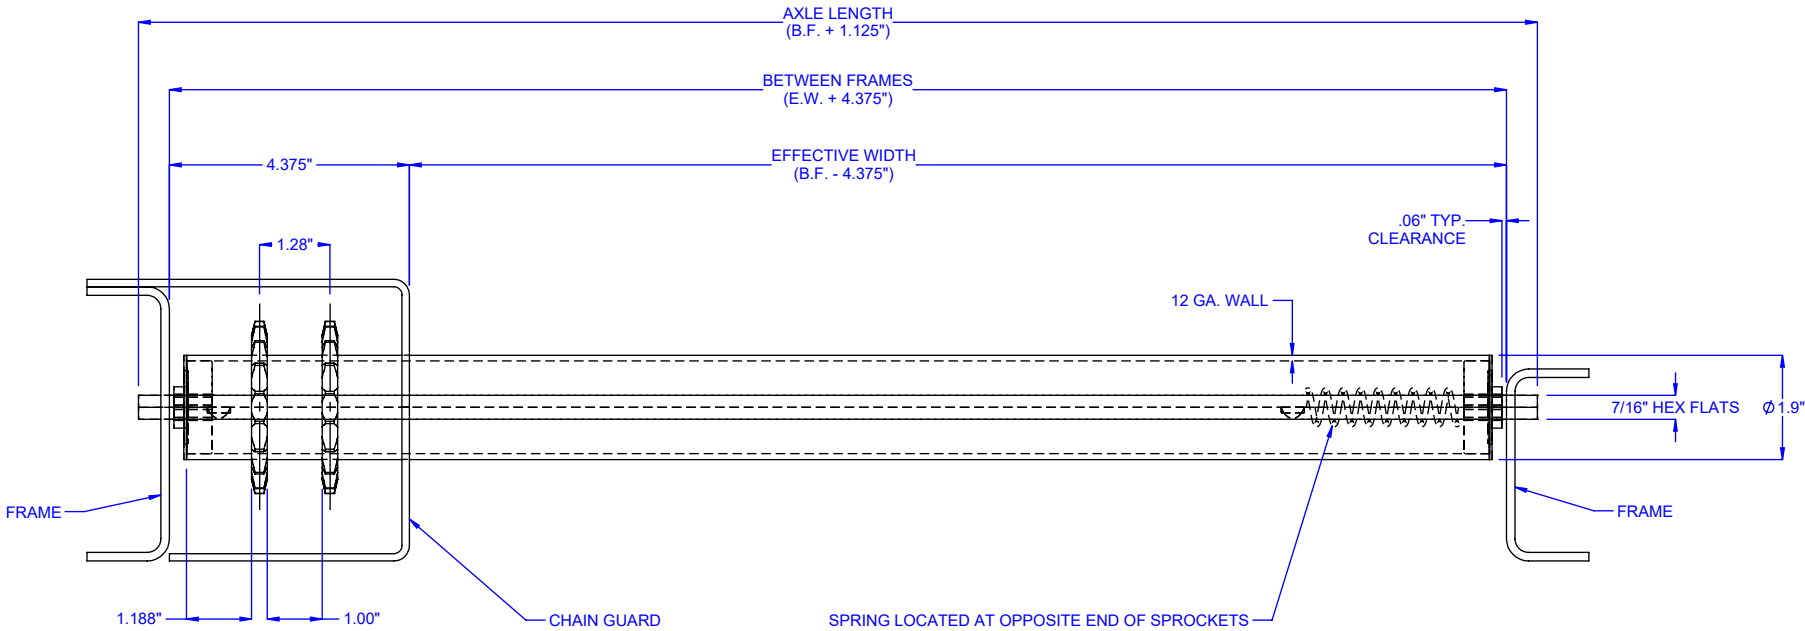

MODEL: R1912S-A24

PART #: CVS0188-A24-*

DESCRIPTION: SPROCKETED ROLLER, 1.9" DIA. X 12 GA. WALL

LEWCO, INC. IS COMMITTED TO CONTINUOUS
IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE
DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.

THIS DRAWING MUST NOT BE COPIED, REPRODUCED
OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN
CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.



706 LANE ST. SANDUSKY, OH 44870, U.S.A.