

SPECIFICATIONS

BETWEEN FRAMES: 23.375" - 68.375"

ROLLER CONSTRUCTION: 2.5" dia. x 11ga. wall, bare carbon steel, pickled & oiled.

SPROCKETS: #60 "A" plate with 15 teeth, heat treated.


BEARINGS: (A63) Precision, grease packed, ABEC-1 with steel cup, 11/16" hex axle, front & back rubber seals, rated for - 4 °F to 180 °F. Other options available.

AXLE RETENTION: Cotter pins.

LOAD CAPACITY: 750 LBS. * Based on 68.375" B.F. with an evenly distributed load. Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V73) Galvanized Steel
- (V83) Stainless Steel Tube & Axle
- (V97) Zinc Plated Carbon Steel
- **NOTE:** Axle & Sprockets are carbon steel unless specified otherwise.

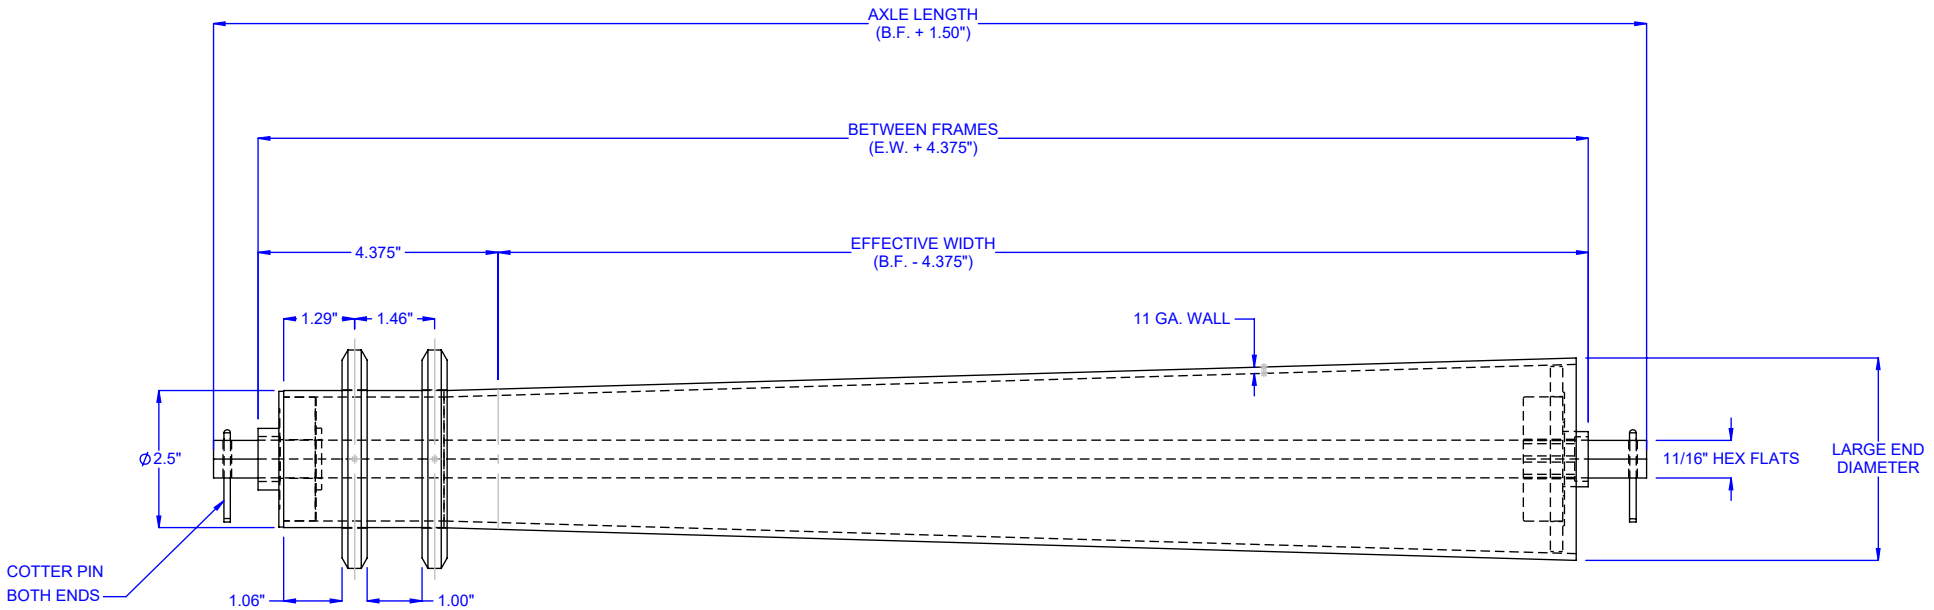

MODEL: R2511ST-A63

PART #: CVS1681-A63-*

DESCRIPTION: SPROCKETED TAPERED ROLLER, 2.5" DIA. X 11 GA. WALL