

SPECIFICATIONS

BETWEEN FRAMES: 10.375" - 68.375"

ROLLER CONSTRUCTION: 2.6" dia. x 7ga. wall, bare carbon steel, pickled & oiled.

SPROCKETS: #60 "A" plate with 15 teeth, heat treated.

BEARINGS: (A63) Precision, grease packed, ABEC-1 with steel cup, 11/16" hex axle, front & back rubber seals, rated for - 4 °F to 180 °F. Other options available.


AXLE RETENTION: 3" long spring, one side. Optional cotter pins.

LOAD CAPACITY: 750 LBS. * Based on 61" B.F. with an evenly distributed load.
Roller capacity may be limited to conveyor frame capacity.

ROLLER TUBE MATERIAL & COVER OPTIONS:

- (V98) *Standard* - Bare Carbon Steel, Pickled & Oiled
- (V97) Zinc Plated Carbon Steel
- (V42) Orange Polyurethane, 1/8" Thick (Carbon steel tube)
- (V11) Black UHMW/ PE ULTREX® Sleeves, 3" O.D., Slip Fit (Carbon steel tube)

NOTE: Axle & Sprocket are carbon steel unless specified otherwise.

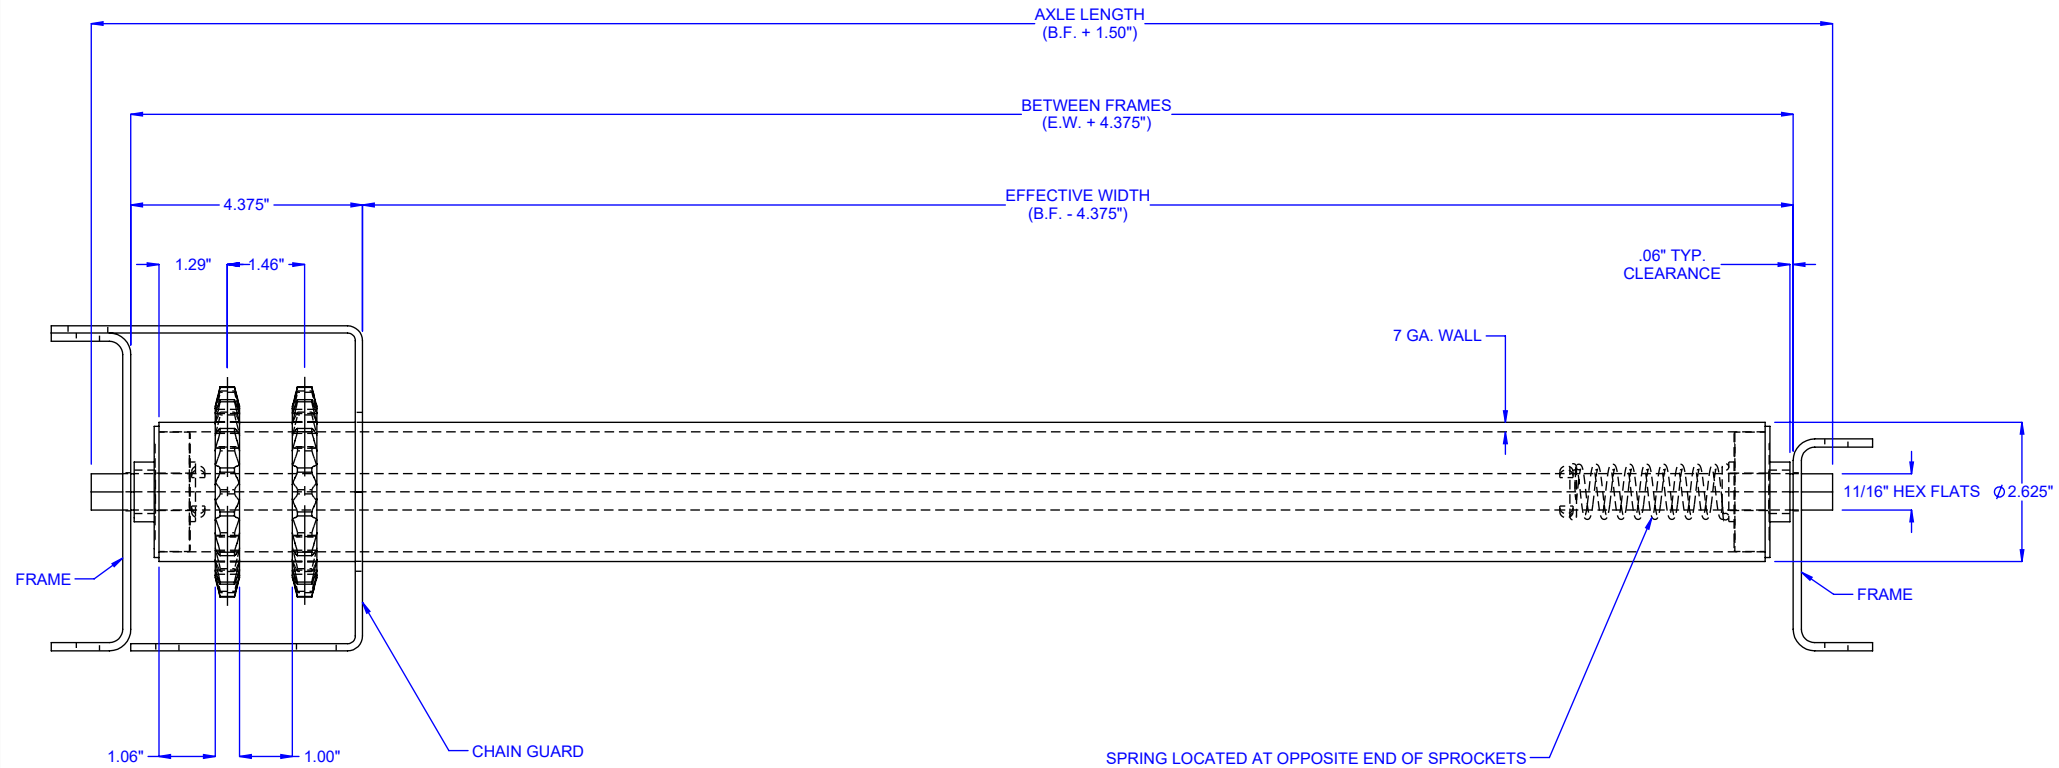

MODEL: R2607S-A63

PART #: CVS0231-A63-*

DESCRIPTION: SPROCKETED ROLLER, 2.6" DIA. X 7 GA. WALL