


LOAD CAPACITY: 50 LB. MAXIMUM CAPACITY USED AS A PACKAGE HANDLING STOP. CONSULT FACTORY FOR OTHER USES. NOT SUITABLE FOR SEVERE IMPACT LOADING.

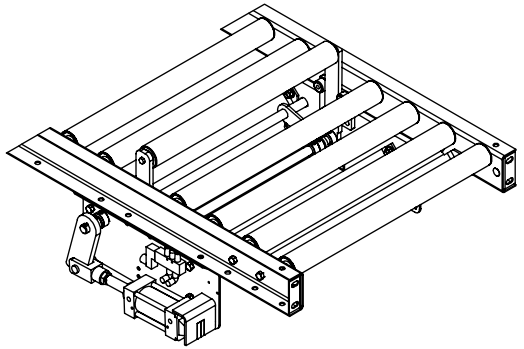

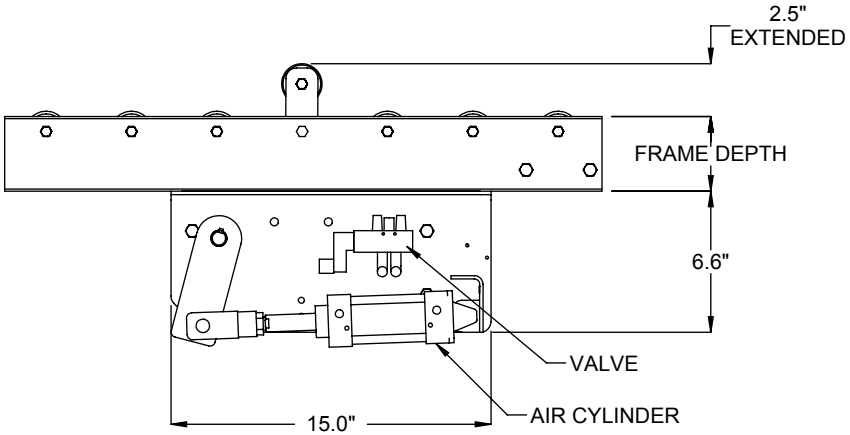

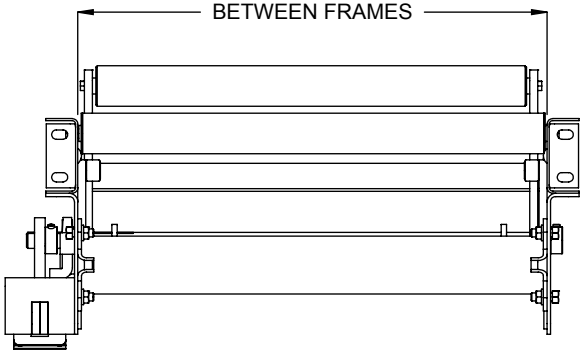

SPECIFICATIONS

BETWEEN FRAMES: 13" - 51"

FRAME DEPTH: 3.5" - 10"

STOP: Standard Roller 1.9" dia., 12 ga. wall tubes with 7/16 hex cold rolled steel axles, spring retained. Optional 3/8" flat bar stop.

CYLINDER: Double acting 2" bore x 2" stroke pneumatic cylinder.

OPERATION: Extending the cylinder engages the escapement stop.

AIR REQUIREMENTS: Standard requires 30-40 psi of clean, filtered, regulated air at consumption of approximately 0.05 cubic feet per stroke. Optional filter/regulator/lubricator available.

VALVE: 24VDC, single solenoid, 2 position, spring return.

FINISH: Standard finish is OSHA safety orange powder.

Model: PCS19 - Pneumatic Conveyor Stops

REV
0

LEWCO